

## Bottom Profiling Arrays and Tow Vehicles

Single- or Two-Channel Pipeliner Side-Mount Arrays


Compatible with Chirp II and Chirp III Systems

LF array, HF array, Hydrophone, Mounting Bracket

The BPA-62X Side-Mount Arrays and Tow Vehicles are specifically designed for detecting and tracking buried pipe.

The **BPA-622 Dual Array** is configured with two transducer arrays (low and high frequencies) and an integrated hydrophone array. The *combined* transmit and receive beam pattern of the BPA-622 is 80° in the forward and aft direction and 32° athwart for the low frequency array, and 120° beam in the forward and aft directions and a narrow, 9° beam athwart for the high frequency array.

The **BPA-621HF Array** is configured with a high frequency transducer array with an option for a separate hydrophone array. The transmit and receive beam pattern for the high frequency array is 120° beam in the forward and aft directions and a narrow, 9° beam athwart.

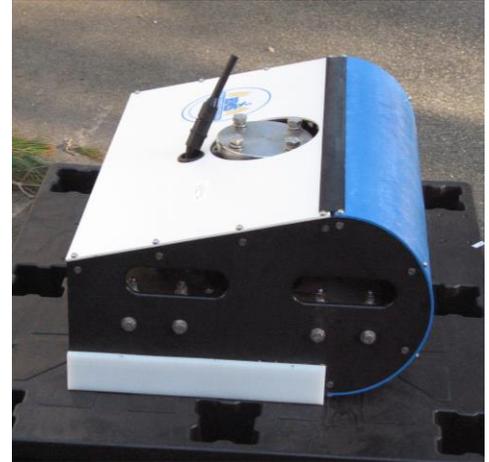

**BPA-622**  
Dual Frequency Array



**BPA-621HF**  
High Frequency Array

### FEATURES/BENEFITS

Standard portable over the side mounting configuration for accurate positioning of buried pipe location

Excellent performance in a variety of sediment types

Can be operated with receive hydrophone for shallow water, or in T/R mode for deeper water

Can be configured with optional tow package for use with armored tow cables

Corrosion resistant construction

Compatible with industry standard sub-bottom profiling systems

# SPECIFICATIONS

## BPA-62X System Specifications

### Physical Characteristics

**BPA-622 Construction:** Stainless Steel frame with a Polycarbonate shell  
**Dimensions:** 61 cm (24.0 in.) long by 77 cm (30.5 in.) wide (Approximate)  
**Weight in air:** 74.8 kg (165 lb)  
**Weight in water:** 45.4 kg (100 lb)  
**Operating depth:** 2000 meters

**BPA-621 Construction:** Aluminum frame  
**Dimensions:** TBD  
**Weight in air:** 30 kg (165 lb)  
**Weight in water:** TBD  
**Operating depth:** 1000 meters

**Operational speed:** 1 to 8 knots operational

### Low Frequency Array

**Transmitter Array:** ATTR-4.5K-45-90  
**Power:** 2kW, 15% duty cycle at 3.5 kHz for 206 dB re 1  $\mu$ Pa @ 1 m nominal,  
4 kW maximum at reduced duty cycle  
**Frequency range:** 2 kHz to 7 kHz band  
**Transducer radiation:** 80° fwd/aft, 32° athwart

### High Frequency Array

**Transmitter Array:** ATTR-15K-9-120  
**Power:** 800 watts, 15% duty cycle at 17 kHz for 212 dB re 1  $\mu$ Pa @ 1 m, nominal,  
4 kW maximum at reduced duty cycle  
**Frequency range:** 8 kHz to 23 kHz band  
**Transducer radiation:** 120° fwd/aft, 9° athwart

### Sonar Receiver

**Receiver hydrophone:** ATHYD – 37K – 5 – 55  
**Frequency band:** 1.5 kHz to 40 kHz

Note: Other products and company names mentioned may be trademarks and/or registered trademarks.

*Specifications Subject to Change without Notice*  
09 April 2015