NOVATECH Minibeacon Pressure Switch Adapter

- Add-on pressure switch
- Submersible to 7,300m
- Activates at the 10m threshold

🚳 TRACKING & MONITORING

NOVATECH[™] products have been proven throughout the world's oceans and trusted around the globe for over 40 years.

The NOVATECH Minibeacon pressure switch adapter is an add-on pressure switch that can be used with any NOVATECH Mini series beacon. It can be submerged for long periods of time in ocean depths up to 7,300m (24,000 feet). The pressure switch automatically turns the beacon OFF below 10m, effectively isolating the power source, and ON when it returns above the 10m threshold.


The pressure switch adapter provides beacons using conductivity sensors with a surface detection method that is less susceptible to bio-growth. It offers beacons a longer term deployment duration and activates before surfacing, at the 10m threshold.





NOVATECH Minibeacon Pressure Switch Adapter

TECHNICAL SPECIFICATIONS

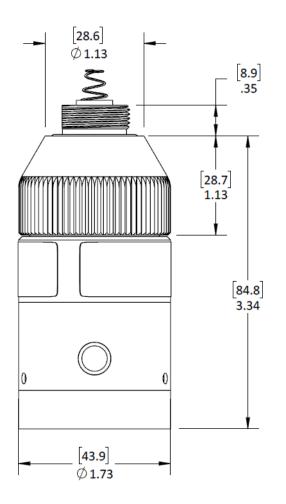

PRODUCT DIMENSIONS

- Overall Height: 3.69 inch (93.7mm)
- Material: Titanium
- · Weight: 402 grams

KIT CONTENTS

- 1 NOVATECH Minibeacon Pressure Switch Adapter Accessory
- 1 O-ring Grease
- 1 Small O-ring M1.5x22, 90 Durometer
- 1 Large O-ring 2-218, 70 Durometer

COMPATIBLE WITH THE FOLLOWING BEACONS:

- iBCN
- MMF
- MMB



HEAD OFFICE

MetOcean Telematics 21 Thornhill Drive Dartmouth, Nova Scotia Canada B3B 1R9 sales@metocean.com

+1 902 468 2505

UNITED STATES

MetOcean Telematics 1750 Tysons Blvd Suite 1500, Office 1547 McLean, VA 22102 sales@metocean.com

+1 844 728 2868

UNITED KINGDOM

MetOcean Telematics Hilldale Farm Titchfield Lane, Wickham, UK P017 5NZ sales@metocean.com

+44 1489 888 555

CANADA

MetOcean Telematics 2 Gurdwara Rd Suite 608 Ottawa, Ontario Canada K2E 1A2 sales@metocean.com

+1 613 702 3196